


HARDSUIT™ LAUNCH & RECOVERY SYSTEMS

CONTROL/WORKSHOP VAN

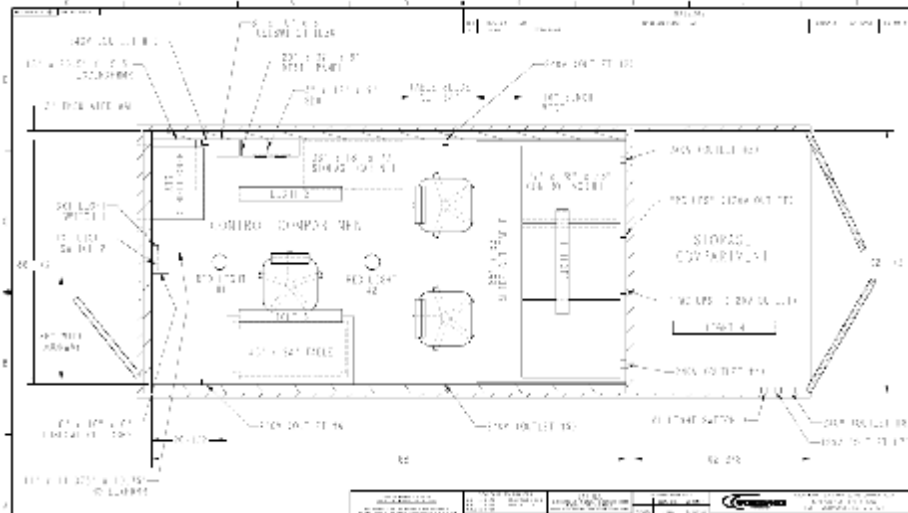

The control van is divided into two areas, the workshop and the control room. The control room contains a console, which provides mounting for the HARDSUIT™ surface equipment and the LARS control module if a LARS is provided. The console is mounted on wheels or rails and can be rolled away from the wall to allow access to the rear of the modules for interconnection purposes. The console can be locked in either position. Connections are made to a wall mounted distribution panel, which connects the modules to an external connector panel.

An overhead fluorescent fixture and a single incandescent bulb provide control room lighting. Emergency lighting (battery supplied) is also provided.

The control / workshop area can be subdivided along the van's 20 foot length in a number of configurations. A 5 foot storage/workshop area can be utilized to store a pair of HARDSUIT™ systems or a single HARDSUIT™ with storage cabinet. Conversely the workshop area can be increased to 10 feet and equipped with a stainless steel pan and hardwood counter for servicing of joints and hydraulic components. Storage cabinets can be arranged to suit customer needs.

OceanWorks International Corporation
3 – 1225 East Keith Road
North Vancouver, BC
Canada V7J 1J3
Tel: 1+604-986-5600
Fax: 1+604-986-7125



OceanWorks International, Inc.
1646 West Sam Houston Parkway N.
Houston, TX 77043
USA
Tel: 1+713-933-8000
Fax: 1+713-933-8006

Website: www.oceanworks.cc

CONTROL / WORKSHOP VAN

Dimensions

Length 6096 mm (240")
Width 2438 mm (96")
Height 2590 mm (102") (96"
option for Air transport)
Per ISO Standard Specification
7540 kg (14,000 lb.)

Construction

Steel construction
2 ½" (63.5 mm) Mineral wool
insulation- control section only
Interior walls 22 Gauge painted steel
Polyurethane insulation under
floor
Heavy gauge vinyl tile floor

Paint

Surface preparation to SSPC-6
2 – Part Epoxy 2-4 Mils
2 – Part Urethane 2-4 Mils

General

1 x Marine man doors,
weatherproof
Emergency hatch
24,000 BTU/hr air conditioner
5000 W Electric Heater
100 Amp Electrical Distribution Panel
2 x 10lb Fire Extinguisher
2 x Smoke Alarm
2 x Operator chairs
Forklift pockets
Pad-Eye lift points
ISO Corner boxes

Power Requirements

120/220 VAC (House Power)
50/60 Hz
50-80 Amp
380-480 VAC (HARDSUIT™ / Spooling Winch Power)
50/60 Hz
30-50 Amp



OceanWorks International Corporation
3 – 1225 East Keith Road
North Vancouver, BC
Canada V7J 1J3
Tel: 1+604-986-5600
Fax: 1+604-986-7125



Website: www.oceanworks.cc

OceanWorks International, Inc.
1646 West Sam Houston Parkway N.
Houston, TX 77043
USA
Tel: 1+713-933-8000
Fax: 1+713-933-8006